


cox box®

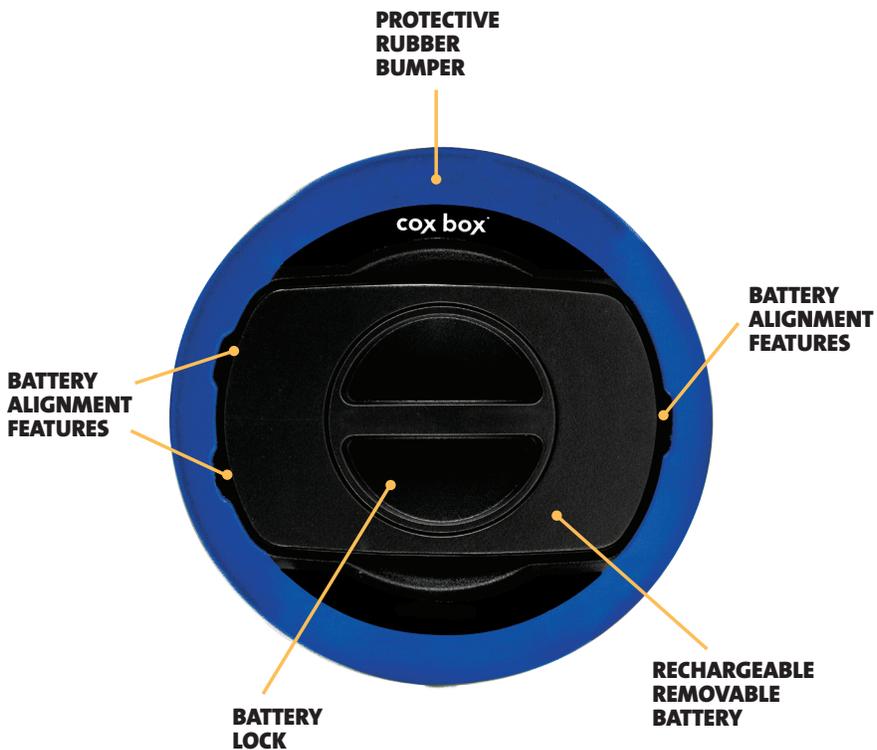

OPERATION

TURN ON


TWIST



Turn on amplifier and display. Increase amplifier volume.
Timer and stroke count will turn on in "STOP". Stroke Rate will operate.

TURN OFF


TWIST, 'CLICK'



Turn off amplifier and display. Decrease amplifier volume.

READY

PRESS



Ready timer and stroke count.


START

ROW!



Row to start timer and stroke count.

AUTOMATIC STROKE MEMORY



Timer, stroke rate and stroke count will keep running until stopped.


Timer will run to 59:59.99 then roll back to 0.

Count will run to 999 then roll back to 0.

Stroke rate will be stored in memory automatically every 10 seconds for approximately 60 minutes.

STORE/SPLIT

PRESS



Store split and rate manually.

Time will freeze so you can read split.

Timer continues internally and display resumes running after 5 seconds.

STOP/RESTART TIMER

PRESS



Stop and restart time and stroke count at any time. Stop time will be recorded as a split.

RECALL MEMORY

PRESS




MANUAL MEMORY REVIEW

PRESS OR

-or-

AUTO MEMORY PLAYBACK

PRESS



Enter memory recall. (Timer must be stopped.)

Manually step forward or backward through memory. Time and rate will display for each 10-second interval. Time, rate and cumulative stroke count will display for each manually stored split. Stroke rate information is an instantaneous snapshot, not averaged.

"Playback" memory automatically. Timer will run and stored rate will display at each 10-second interval. Rate and cumulative stroke count will display at each manually stored split. Stroke rate information is an instantaneous snapshot, not averaged.

EXIT/RECALL


HOLD



Exit recall.

CLEAR/ZERO

HOLD



Hold to clear memory and zero timers.

Timer must be stopped.

Must hold until "CLEAR" disappears and display shows "0's."

BATTERY USE AND CHARGING

BATTERY LIFE		<p>Each bar represents 20% of battery life.</p> <p>Should run minimum of 4 hours per full charge.</p>
CHARGING		<p>Use any standard Cox Box wall or car charger. A fully drained battery requires 9.5 hours of charging to reach full capacity.</p>
FULL CHARGE		<p>Display will show charge percentage and read "Full" when complete.</p> <p>Charge management logic protects from overcharging. However, avoid leaving on charge for more than 7 days to preserve life of your battery.</p>
REPLACE BATTERY		<p>Be sure to line up "double bump" end of battery with double grooves when inserting new battery.</p> <p>Twist locking ring to "CLICK" to ensure it is locked in place.</p>
WARNING!		<p>Battery does not float.</p> <p>If battery pins or contacts become wet, dry thoroughly before use.</p>
STORAGE		<p>Charged batteries will hold their charge for 12 months. Keep one on hand to ensure uninterrupted Coxing!</p> <p>(Avoid storing batteries where temperature will exceed 140° F/60° C such as a car in hot sunlight.)</p>

ERROR MESSAGES

<p>Battery voltage temperature or charging time has exceed normal limits during charge. Continued charging can be dangerous.</p>		<p>ACTION:</p> <p>Ensure charging environment is not above 100° F/30° C. If error persists, replace battery pack. Return failed pack to NK.</p>
--	---	--

SPECIFICATIONS

WEIGHT	<p>Control Unit, Bumper, Battery Pack: 1 lb., 3.9oz. Battery Pack: 3.8oz.</p>
SIZE	<p>4x4 in (fits in all existing cup brackets)</p>
BOUYANCY	<p>Control unit with battery installed floats. Control unit alone floats. Battery does not float.</p>
SEALING	<p>Waterproof (IP67)</p>
MEMORY	<p>Automatic memory: stroke rate every 10 seconds, up to 60 minutes. Manual memory: time, stroke rate, stroke count. Each manual point stored will decrease the auto memory capacity by 50 seconds.</p>
BATTERY CAPACITY	<p>Minimum continuous talk time: 1 hour. Standby: 25 hours. Typical use: 4 hours (typical defined as 1/2 volume and talking 1/2 of the time). 10w hr. lithium battery.</p>
BATTERY LIFE EXPECTANCY	<p>Battery pack can be expected to last 300 full charge/discharge cycles. The expected cycles increases greatly for partial charge/discharge.</p>
ENVIRONMENTAL	<p> The Cox Box conforms with Council Directive 2004/108/EC (December 15, 2004) on Electromagnetic Compatibility and is CE-marked accordingly. It is also RoHS (Reduction of Hazardous Substances) compliant and marked in accordance with the WEEE (Waste Electrical and Electronic Equipment) Directive. Please do not dispose of the Cox Box or battery pack in your household trash. Return to NK, an NK dealer, or a designated recycling center for proper recycling and disposal.</p>


cox box®

MAINTENANCE

Follow these steps to keep your Cox-Box, Microphone & Wiring static-free and reliable for years. Use a Cox Box maintenance kit for best results, at least monthly (more often with salt water exposure), WASH the Cox Box panel with warm water and mild soap, RINSE well and DRY thoroughly. Inspect connectors regularly and maintain at least monthly. Connectors should have a visible coating of grease at all times.



Avoid excess bending of microphone connector during transport or use .



ROTATE DRILL BIT inside metal sockets of rubber P5 and P2 connector to dislodge dirt and corrosion and lift debris out of sockets



APPLY ELECTRICAL CONTACT GREASE from syringe inside metal sockets. Avoid over filling sockets or getting into rubber.



USE FOAM SWAB to apply SILICONE from small plastic tub to...



...OUTSIDE OF P5 and P2 connectors until a visible film of SILICONE covers surface. (Keep foam swab in provided bag for future use.)



Nielsen-Kellerman • 610.447.1555 • www.nkhome.com

© Copyright NK 2009 All rights reserved. The following are registered trademarks of the Nielsen-Kellerman Company: NK, the NK logo, Cox Box.